


## DOOR TYPES

### POLYSTYRENE CORE

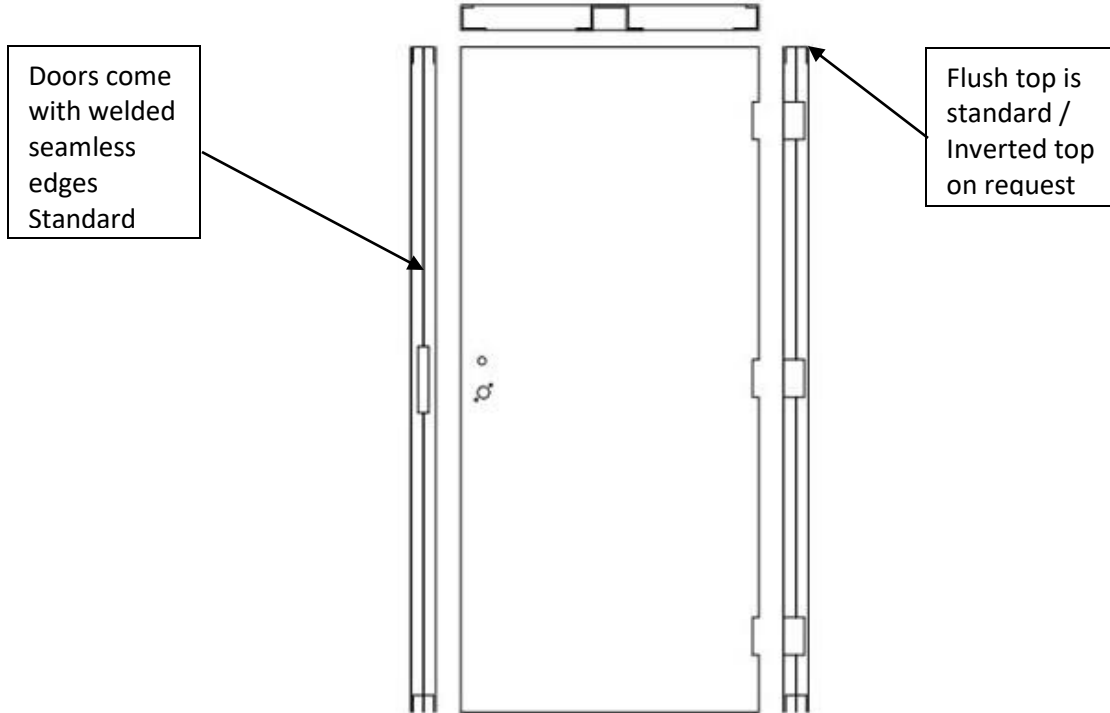

#### Insulating Polystyrene Core

Your choice of door skin gauges and your choice of steel types:

18ga, 16ga, 14ga, 12ga or 10ga with CRS, A60, G90, or Stainless Steel # 304 or # 316

1-3/8", 1-3/4" or Custom Thickness, UL's Fire Rated Labels

Min. Sound Transmission (STC) ~ 30

Max. Sound Transmission (STC) ~ 37

Max. Thermal "R" Value ~ 5.5

Max. "U" Factor ~ 0.2

Square or Beveled Edge choices:

Welded Smooth Seamless Vertical Edges Standard, Stitch or Continuously Welded

Solid Core, Single Rib, or Multiple Ribbed, Core Constructions



3228 6th Avenue North

P.O. Box 635, Birmingham, AL 35201

205-322-7700 Fax: 205-322-4600 [www.megametUSA.com](http://www.megametUSA.com)