


TEMPERATURE RISE CORE

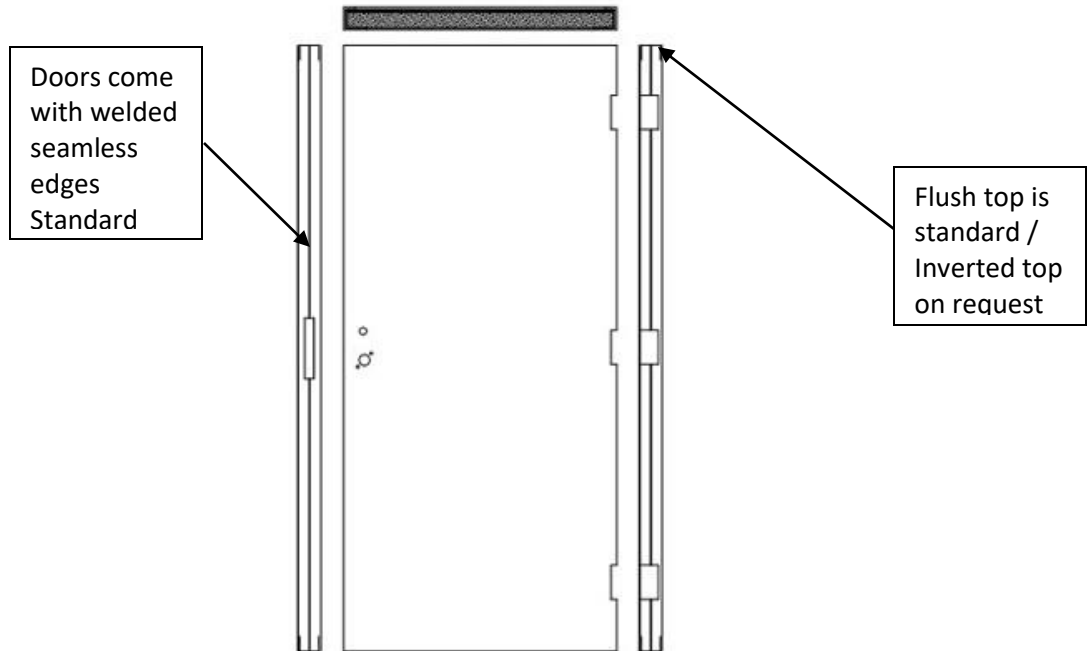

Mineral Core

Your choice of door skin gauges and your choice of steel types:

18ga, 16ga, 14ga, 12ga or 10ga with CRS, A60, G90, or Stainless Steel # 304 or # 316

1-3/8", 1-3/4" or Custom Thickness, UL's Fire Rated Labels

Temperature Rise Rating Labeled

Min. Sound Transmission (STC) ~ 32

Max. Thermal "R" Value ~ 4.0

Max. "U" Factor ~ 0.28

Square or Beveled Edge choices:

Welded Smooth Seamless Vertical Edges Standard, Stitch or Continuously Welded

Solid Core only for rated openings, Single Rib, or Multiple Ribbed, Core Constructions



3228 6th Avenue North

P.O. Box 635, Birmingham, AL 35201

205-322-7700 Fax: 205-322-4600 www.megametUSA.com